
Datenblatt/ datasheet

Artikelnummer/Itemnumber: 489F

Absperrpfosten, Stahlrohr Ø 89 x 2,9 mm, herausnehmbar, mit Dreikantverschluss, feuerverzinkt, ohne Öse

Barrier posts, steel tube Ø 89 x 2,9 mm, removable, with triangular locking mechanism, hot-dip galvanized, without eyelet



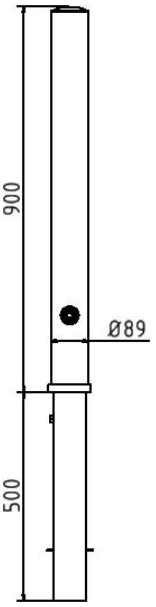

Artikelbeschreibung:

Absperrpfosten, Stahlrohr Ø 89 x 2,9 mm, mit aufgeschweißter Stahlkappe, 900 mm Überflur, herausnehmbar, mit Dreikantverschluss nach DIN 3223, selbsteinrastende Verriegelung, mit Bodenhülse Typ 470.10, ca. 500 mm Unterflur, feuerverzinkt, ohne Öse

Verwendungszweck:

Zum Sperren, Sichern und Schützen von Bereichen.

Technische Daten:

Gewicht: 13,00 kg/St
Material:
S235 JR

Oberfläche:
Feuerverzinkung nach DIN ISO 1461

item description:

Barrier posts, steel tube Ø 89 x 2,9 mm, with welded steel cap, 900 mm above ground, removable, with triangular locking mechanism acc. with DIN 3223, self engaging lock, with ground socket part-no. 470.10, approx. 500 mm below ground, hot-dip galvanized, without eyelet

designated purpose:

For stopping, and securing or saving of areas.

technical specifications:

weight: 13,00 kg/pc
material:
S235 JR

surface:
hot dipped galvanized acc. to DIN ISO 1461